


**Mosaic™**  
**2P+E Flush socket outlets**  
**French/Belgian standard**

Cat. No(s): 2 781 11L - 2 782 14L



2 781 11L


**1. USE**

Shuttered 2P+E Flush socket outlets.  
Easy to clean and prevent accumulation of dirt.  
Flush or surface-mounting.  
For installation in flush-mounting box 40 mm deep (minimum recommended).

**2. RANGE**

Description	White	Aluminium
2P+E Flush - 2 modules	2 781 11L	2 782 14L

**3. DIMENSIONS (mm)**

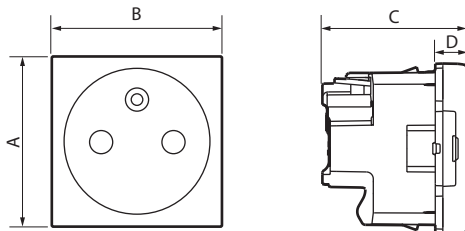

A	B	C	D
45	45	38.5	8.5

**4. CONNECTION**

Type of terminals: automatic  
Number of terminals: 3 inputs, 3 outputs  
Terminal capacity: 2 x 2.5 mm<sup>2</sup>  
Stripping length: 12 mm

**5. TECHNICAL CHARACTERISTICS**

■ **5.1 Mechanical characteristics**

Penetration by solid/liquid matter: IP 40 for assembled product  
Impact resistance: IK 04

■ **5.2 Material characteristics**

Mechanism casing: PC  
Cover plate: White RAL 9003 ABS + PC  
Painted glittery varnished aluminium ABS + PC

Halogen-free  
UV-resistant

Self-extinguishing:  
850°C/30 s for insulating components holding live parts in place.  
650°C/30 s for other insulating components.

■ **5.3 Electrical characteristics**

Current: 16 A  
Voltage: 250 V~

■ **5.4 Climate characteristics**

Storage temperature: -10°C to +70°C  
Usage temperature: -5°C to +35°C

**6. CARE**

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
Resistance to the following cleaning products: Hexane (NF C 61-314), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

**7. STANDARDS AND APPROVALS**

Compliant with installation and manufacturing standards.  
See e-catalogue.